


**Viti a testa svasata con cava esalobata**  
**Hexalobular socket countersunk head cap screws**

**DIN 7991**  
**6 lobi**

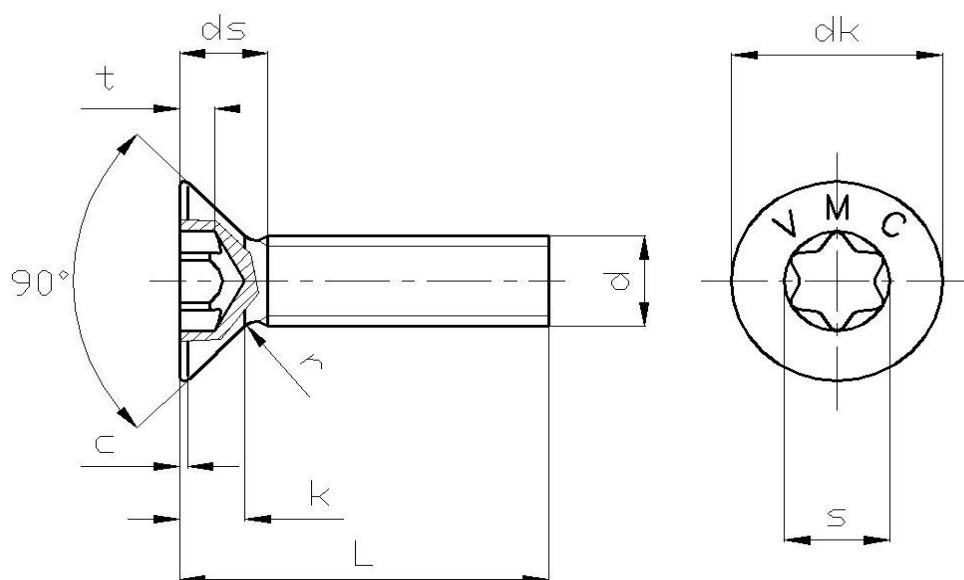

Diametro		M3	M4	M5	M6	M8	M10
P	passo	0,5	0,7	0,8	1,0	1,25	1,5
ds	max	3,20	4,40	5,20	6,30	8,20	10,00
c	≈	0,2	0,3	0,3	0,3	0,4	0,5
dk	max	<b>6,00</b>	<b>8,00</b>	<b>10,00</b>	<b>12,00</b>	<b>16,00</b>	<b>20,00</b>
	min	<b>5,70</b>	<b>7,64</b>	<b>9,64</b>	<b>11,57</b>	<b>15,57</b>	<b>19,48</b>
k	max	<b>1,70</b>	<b>2,30</b>	<b>2,80</b>	<b>3,30</b>	<b>4,40</b>	<b>5,50</b>
r	min	0,1	0,2	0,2	0,3	0,5	0,5
s	<b>T</b>	<b>10</b>	<b>20</b>	<b>25</b>	<b>30</b>	<b>40</b>	<b>50</b>
	rif	2,8	3,95	4,5	5,6	6,80	8,95
t	max	1,00	1,35	1,70	1,85	2,30	2,85
	min	0,75	1,00	1,30	1,40	1,80	2,40